



Nimbus Bespoke (Static White)



Recessed

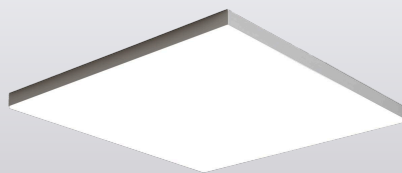

Surface Mounted

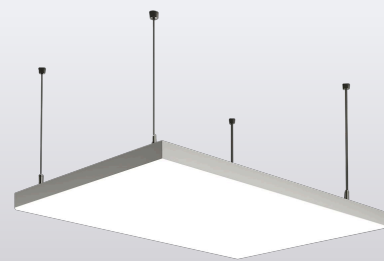

Suspended

ABOUT NIMBUS BESPOKE

Nimbus Bespoke is our fabric-based luminous ceiling solution, offering complete design freedom with diffusers that create smooth, even illumination. Using stretch fabric or fabric diffuser surfaces, Nimbus Bespoke achieves a seamless finish with uniform light distribution, bringing ceilings to life.

General Information

Mounting Type	Surface, Recessed, Suspended
Diffuser Material	Stretch Ceiling Membrane
Frame Material	Extruded Aluminum
Colour Options	Powder-coated in white, black, or custom RAL finishes
Light Source	Lumimesh Backlighting System
Fire Rating	UL 723 / NFPA 255 / ASTM E84
Control Compatibility	0–10V, DALI
Certifications	ETL Listed
Warranty	5-Year Limited Warranty

Highlight Features

Architectural Freedom

Custom-built to any shape, size, or configuration, Nimbus Bespoke adapts effortlessly to unique ceiling geometries, allowing designers to realize truly one-of-a-kind luminous surfaces.

Seamless Integration


Designed to work in harmony with ceilings and wall planes, the system installs cleanly with minimal visual disruption, enhancing spatial flow and continuity.

Uniform Illumination

Utilizing Eterna Light's Lumimesh backlighting system, Nimbus Bespoke achieves perfectly even light diffusion across large spans—free from hotspots, glare, or visible seams.

Precision Engineered

Every system is built with extruded aluminum framing and premium components to ensure stability, longevity, and consistent lighting quality throughout its lifespan.



Nimbus Bespoke (Static White)



Agency:

Project Name:

Project Type:



Product Code

(Example: NIMB-SW-RC-1'X2'-SRF-WH-STA-30K-DMV)

1 Product Name	2 Shape	3 Dimensions	4 Mounting	5 Profile Finish
NIMB-SW – Nimbus Bespoke Static White	RC – Rectangle CI – Circle HX – Hexagon CST – Custom	WXL – Width x Length SQF – Square Footage D – Diameter	SRF – Surface Mounted SUP – Suspended REC – Recessed	WH – White BK – Black CA – Clear Anodized CST – Custom RAL
6 Lumen/Watt	7 CCT	8 Dimming		
STND – Standard ENCD – Enhanced	27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K	DMV – 0/10V DALI – DALI		

Order Code


1	2	3	4	5	6
7	8				

Complete the order code by selecting one option per category.

Nimbus Bespoke (Static White)



Lumimesh Lighting System (CCT)

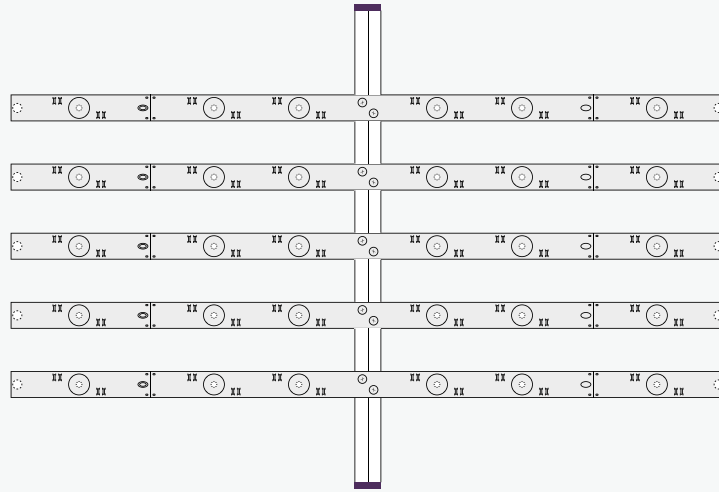

Selecting the right color temperature can dramatically influence the atmosphere and functionality of a space. From warm and relaxing environments to bright, focused work areas, our range of CCT options ensures the perfect lighting tone for every application.

For more information, consult an Eterna Light specialist.

2700K – A cozy, amber glow that brings a sense of warmth and relaxation, ideal for creating intimate, comfortable spaces.

3000K – A soft white light that feels both inviting and functional, providing just the right balance for everyday settings.

3500K – A versatile hue that combines gentle warmth with a touch of brightness, making it perfect for welcoming, ambient environments.

4000K – A neutral white tone that enhances visibility and supports concentration, well-suited for offices, studios, and task-oriented areas.



Nimbus Bespoke (Static White)





Profile Details

SL-127





Details

Dimensions 76.00mm x 38.00mm**Weight** 1.15 Kg/m (0.77 lbs./ft)

SL-140





Details

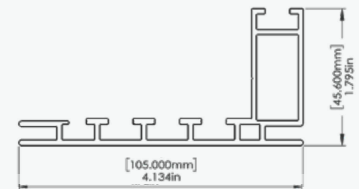Dimensions: 105.00mm x 45.60mm**Weight:** 1.51 Kg/m (1.01 lbs./ft)

SL-178



Details

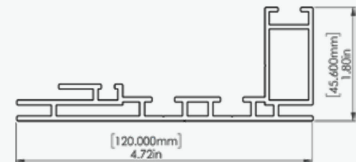Dimensions: 120.00mm x 45.60mm**Weight:** 1.99 Kg/m (1.34 lbs./ft)

Specifications for all profiles are outlined [here](#).




1-10V




Nimbus Bespoke (Static White)

Mounting Options


Surface Mounted

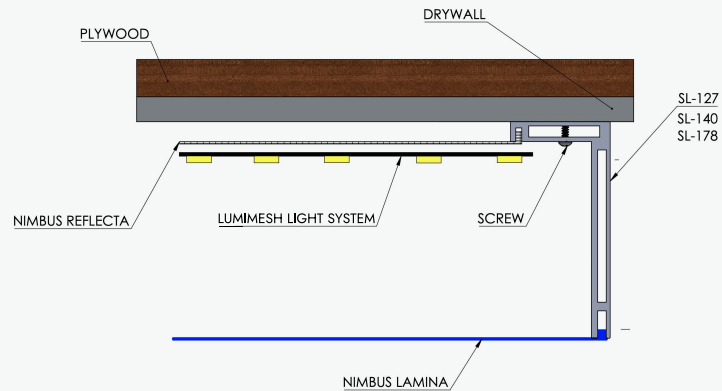

Suspended

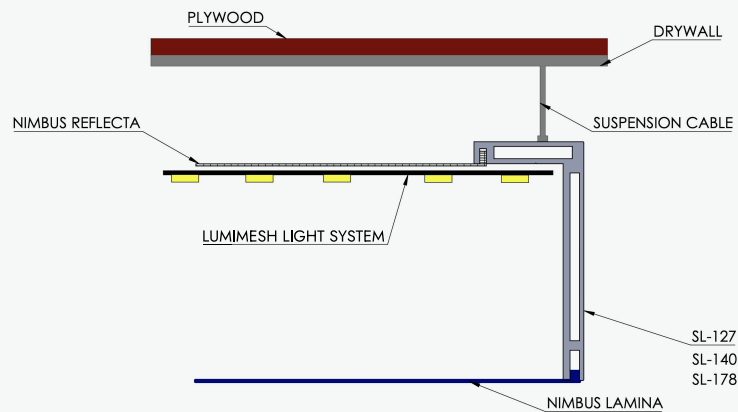

Recessed

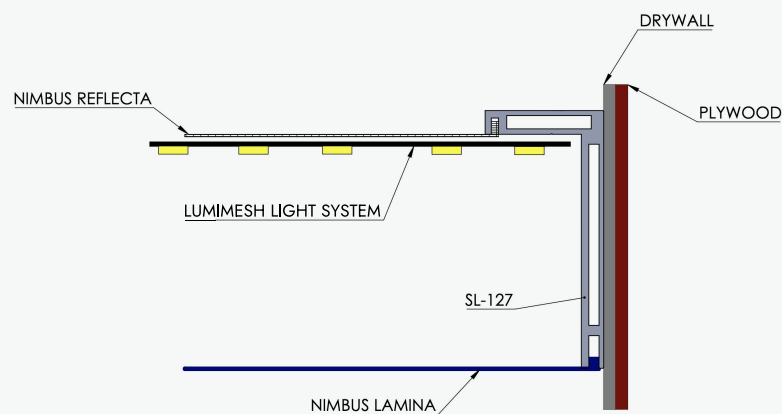

For more information regarding installation, consult with an Eterna Light representative

Nimbus Bespoke (Static White)



Membrane Details

ABOUT NIMBUS LAMINA

Nimbus Lamina is a high-performance stretch ceiling membrane designed for both printed and non-printed applications. Paired with our Lumimesh tension-free, backing-free lighting system, it delivers flawless, uniform light diffusion that enhances any space. Its flexible construction molds effortlessly to unique architectural forms, unlocking endless creative possibilities in lighting design. Lightweight yet durable, Nimbus Lamina is simple to install and maintain, making it the perfect choice for both residential and commercial interiors. Transform your environment with the elegance and reliability of Nimbus Lamina.

Specifications

Thickness	0.2 mm
Weight	200 gm/m2
Fire Rating	UL 723 / NFPA 255 / ASTM E84 / B-s1 d0
Class	A
Recyclable	100%
Pre-Consumer Recycled Product	40%
Certifications	UL Listed
Warranty	5-Year Limited Warranty

For more information regarding the membrane, consult with an Eterna Light representative

Nimbus Bespoke (Static White)



Technical Specifications

MATERIAL & CONSTRUCTION

Crafted with aluminum extrusion and stretch fabric, Nimbus Bespoke delivers exceptional durability and a seamless aesthetic. The lightweight structure ensures stability while maintaining ease of installation across large-scale or custom architectural ceilings. Every system is built to maintain fabric tension and surface uniformity over time, ensuring long-lasting performance and visual consistency.

DESIGN FLEXIBILITY

Nimbus Bespoke is fully customizable to any size, shape, or configuration, adapting effortlessly to the architectural intent of each project. The system supports a wide range of mounting methods for both ceiling and wall integration, with customizable edge profiles and frame depths.

LIGHT OUTPUT & PERFORMANCE

Powered by Eterna Light's Lumimesh backlighting system, Nimbus Bespoke provides uniform, shadow-free illumination across its entire surface. Available with Static White, Tunable White, or RGBW light engines, it achieves exceptional color rendering (CRI 90+) and smooth, even brightness distribution.

COLOR TEMPERATURE & CONTROL OPTIONS

Nimbus Bespoke offers a full range of lighting options, including Static White (2700K–4000K), Tunable White (2700K–5700K), and RGBW for dynamic color-changing applications. Compatible with leading control protocols such as 0–10V & DALI, it enables flexibility for both functional and ambient lighting designs.

POWER & ELECTRICAL

Each driver setup is optimized for energy efficiency and flicker-free dimming. Voltage compatibility includes 120–277V, ensuring adaptability for both residential and commercial projects.

LIFE EXPECTANCY & OPERATING CONDITIONS

Engineered for longevity, Nimbus Bespoke's LED light engines maintain over 60,000 hours of consistent performance (per IES LM-80 data). Designed for stable operation in environments ranging from –10°C to 40°C (14°F to 104°F), it delivers reliable, maintenance-free performance over years of continuous use.

CERTIFICATIONS & RATINGS

Nimbus Bespoke is UL Listed and Damp Rated, meeting rigorous safety and performance standards in accordance with North American electrical and building codes. The system is also tested to meet stringent fire safety standards, including UL 723, NFPA 255, ASTM E84, and Bsl d0, ensuring safe and compliant operation.

